



SOLENOIDE LARGA DISTANCIA NO 24 VAC

Technical Specifications

Voltage :	12V DC or 24V AC + 10% - 20%
Current :	Holding 15mA
Power:	1/3W
Delay Time:	See table
Connection:	DIN 43650 Connecting box Flying leads Protection class IP65 with connector

Delay time (Sec) at a nominal voltage	Distance (Km)	Conduit Section (mm)
4 - 5	2.4	0.5
	4.8	1.0
	7.5	1.5



Pressure Table

Function	Orifice	Pressure
3WNC	1.6	16
	2.0	10
	2.4	8
3WNO	1.6	16
	2.0	12
	2.4	8

Notes :

- 1- We can only guarantee that this appliance will work if a Baccara valve is purchased with it.
- 2- To order valves manufactured to your specific requirements, please contact our technical sales department.

Dimensions

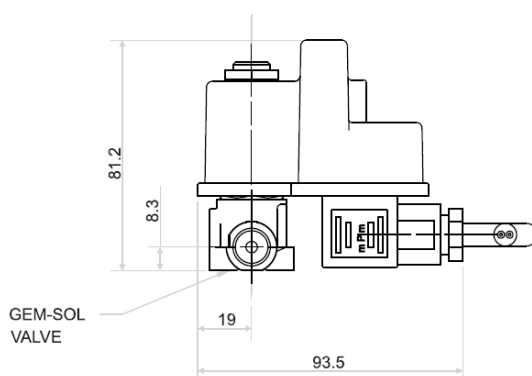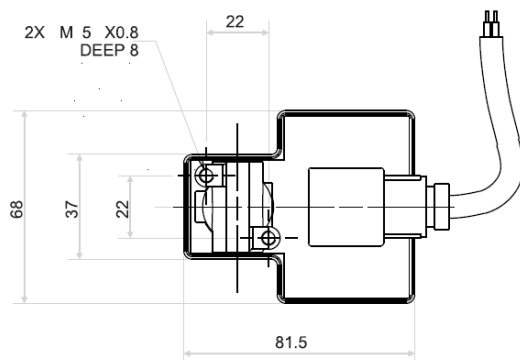

How to Order

Example : GEM-LDOS - 21034N0-11

Is a LDOS 1/8" BSP Brass 3WNC, 2.0 orifice, NBR, no manual override, 24V AC with connector.

GEM - LDOS	Body	Port	Function	Orifice	Seals	Manual Override	Voltage	Connector
Brass	1/8"BSP	10	3W NC	1.6	NBR	None	24V AC	without
	1/4"BSP	20	3W NO	2.0	VITON		12V DC	with
	1/8"NPT	11		2.4	EPDM			flying leads
	1/4"NPT	21						coil