

Codice	Modello	Diametro	Altezza	Raccordo ingresso acqua	Membrana in gomma	Pressione di precarica standard	Pressione massima di esercizio	Temperatura di esercizio	Finitura esterna colore
Code	Model	Diameter	Height	Water entry connection	Rubber membrane	Standard pre-loading pressure	Maximum working pressure	Working temperature	External finishing colour
Code	Model	Durchmesser	Höhe	Wasseranschluß	Gummi Membrane	Standard Vordruck	Maximaler Betriebsdruck	Betriebstemperatur	Externe Beendenfarbe
Code	Modèle	Diamètre	Hauteur	Raccord d'entrée de l'eau	Membrane en élastomère	Pression de prégonflage standard	Pression maximale de service	Température de service	Couleur de finition externe
Código	Modelo	Diámetro	Altura	Racor entrada agua	Membrana de goma	Presión de precarga standard	Presión máxima de ejercicio	Temperatura de trabajo	Acabado exterior color
		Ø mm	(H) mm	G		Bar	Bar	°C	

AFE

con tirante di fissaggio membrana / with membrane fixing tie rod / mit Membran Spurstange /
avec tirant de fixation vessie / con tirante de fijación de membrana

620100/010	AFE CE 100 ct	460	880	M 1"Gas	EPDM	2,5	10,0	-10 +100	Blu, Blue, Blau, Bleu, Azul, RAL 5015
620150	AFE CE 150	510	1030	M 1"Gas	EPDM	2,5	10,0	-10 +100	Blu, Blue, Blau, Bleu, Azul, RAL 5015
620200/020	AFE CE 200	590	1100	M 1"1/4 Gas	EPDM	2,5	10,0	-10 +100	Blu, Blue, Blau, Bleu, Azul, RAL 5015
620300	AFE CE 300	650	1250	M 1"1/4 Gas	EPDM	2,5	10,0	-10 +100	Blu, Blue, Blau, Bleu, Azul, RAL 5015




AFE 35



AFE 35-50



AFE 60-300

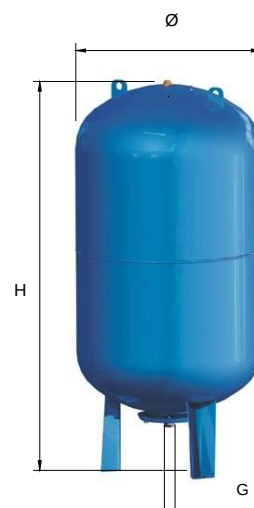

AFE 500